



Operator's Manual

user manual, maintenance instructions and spare parts


28MT Multi-Tool



Read this manual carefully before operating the machine

Original Instructions Version June 16

28MTa_160616

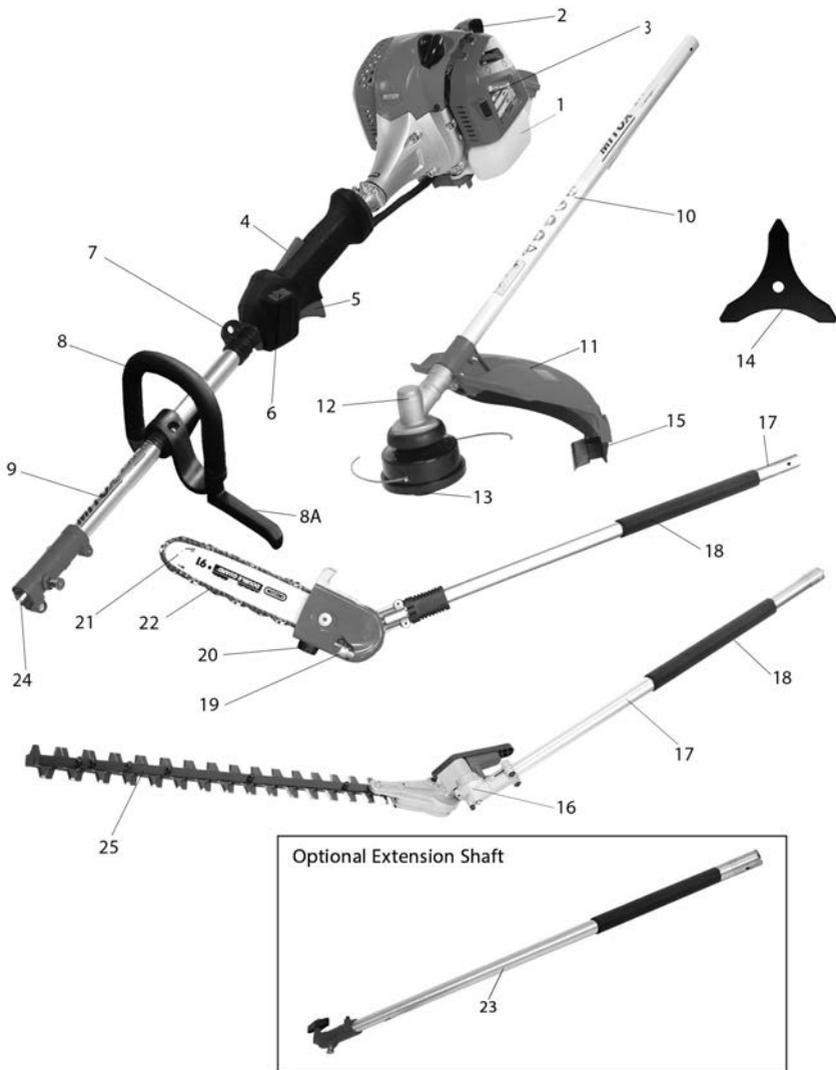

PRODUCT DESCRIPTION

This Multi-Tool unit is a 2 stroke fast running power tool and is designed to be used in a domestic application with the attachments supplied. The Brushcutter attachment is designed for cutting grass and light brush, the Hedgetrimmer attachment for trimming new growth on hedges and the Pole Pruner for cutting up to 4" branches.

Component Location

1. Fuel tank – 2 stroke mixture.
2. Engine starter/Recoil.
3. Carburettor / air filter.
4. Safety lever.
5. Throttle control lever.
6. Ignition switch.
7. Harness hanger.
8. Loop handle.
- 8A J-Handle.
9. Transmission shaft.
10. Attachment shaft.
11. Safety guard.
12. Gear box.
13. Nylon head.
14. Optional cutting blade.
15. Nylon Cutting blade.
16. Gear box.
17. Attachment shaft.
18. Rubber Grip.
19. Gear box.
20. Oil tank for lubrication.
21. Guide Bar.
22. Saw chain.
23. Extension Shaft (Optional)
24. Coupling.
25. Cutter Blades.

Warnings in the Manual



This mark indicates instructions which must be followed in order to prevent accidents which could lead to serious bodily injury or death.



This mark indicates instructions which must be followed or it leads to mechanical failure, breakdown, or damage.



This mark indicates hints or useful directions in the use of the product.

Safety Symbols

Warning: Danger, Caution	
Read the documentation and safety instructions which are provided in this user manual.	
When operating this machine, use protective equipment such as goggles, helmet and ear defenders.	
Wear security shoes and gloves.	
Check the condition of the working area to avoid any accidents from hitting hidden obstacles such as stumps, stones, cans, or broken glass.	
Hot surface: Risk of burn.	
Directive 2000-14/CE. Guaranteed noise levels	
Beware of objects being thrown from the operating zone	
Warning: Keep all people, animals and vulnerable objects at least 15 metres from the working area.	
Beware: Product conducts electricity. Keep the machine and operator at least 10 metres from electrical sources and overhead power cables.	
Beware: Keep hands and feet away from moving parts. Always keep a safe distance from the cutting parts.	
Beware of blade thrust.	

Taking Care of Warning Labels

Always keep warning labels clean and free of scratches, which might make them illegible or difficult to read. If the warning labels provided with your Multi-Tool become damaged, peel off, or otherwise become illegible or difficult to read, order new labels from the authorised servicing dealer and replace the damaged labels. When applying new labels, first wipe away any dirt and dry the surface before applying the new label in the same place as the original label.

Explanation of Symbols on the Machine

For safe operation and maintenance, symbols are carved in relief on the machine:



FUEL TANK

Fuel tank 2 stroke mix
Position: Fuel cap



CHOKE OPERATION

<RUN>

Starting mode when the engine is hot (choke off).
Position: Air cleaner cover.



<START>

Starting mode when the engine is cold (choke on).
Position: Air cleaner cover.

Safety Precautions

Introduction

Read this Owner/Operator Manual carefully. Be sure you understand how to operate this Multi-Tool properly before you use it. Failure to do so could result in serious injury.

Keep this manual handy so that you may refer to it later whenever any questions arise. Also note that you are able to contact the dealer from whom you purchased the product for assistance.

Always include this manual when selling, lending, or otherwise transferring the ownership of this product.

This product has been designed to be used as a Multi-Tool power tool as described previously and it should never be used for any other purpose; doing so could result in unforeseen accidents and injuries occurring. Only approved Mitox accessories should be used with this product.

This Multi-Tool is equipped with extremely sharp blades, always wear sturdy gloves when handling the blades and fit the safety guards when not in use.

When using this Multi-Tool for the first time, take it to a wide, clear, open space, start the engine, and practice handling the Multi-Tool until you are sure that you will be able to handle it properly in actual operation.

You should never use this Multi-Tool when under the influence of alcohol, suffering from exhaustion or lack of sleep, suffering from drowsiness as a result of having taken medicine, or at any other time when your judgement might be impaired or that you might not be able to operate the Multi-Tool properly and in a safe manner.

Never allow children or anyone unable to fully understand the directions given in this manual to use this Multi-Tool.

When planning your work schedule, allow plenty of time to perform the work and allow plenty of time for rest. Limit the amount of time you continuously use the Multi-Tool to 30~40 minutes per session and take 10~20 minutes of rest between work sessions. Also, try to keep the total amount of work performed in a single day to 2 hours.

Never run the engine indoors as the exhaust gases contain harmful carbon monoxide.

Never use the Multi-Tool in conditions as described below:

When the ground is slippery or when other conditions exist which might make it difficult to maintain a steady posture while using the Multi-Tool.

At night, at times of heavy fog, or at any other times when your field of vision is limited and it would be difficult to gain a clear view of the area where the Multi-Tool is to be used. In heavy rain, during lightning storms, at times of strong or gale-force winds, or at any other times when weather conditions might make it unsafe to use this product.

Lack of sleep, tiredness, or physical exhaustion results in lower attention spans, and this in turn can lead to accidents and injury.

Work Clothing and Safety Equipment

When using the product, you should wear proper clothing and protective equipment.

- Helmet
- Protection goggles or face protector
- Ear protectors
- Thick work gloves
- Non-slip sole work boots
- When using your Multi-Tool, always wear strong, durable, work clothing; shirts should be long-sleeved and trousers should be full-length.

Safety and Operation



This Multi-Tool is equipped with very sharp blades, and when used incorrectly the blades can be extremely dangerous.

Improper handling can cause accidents which may in turn lead to serious injury or death. For this reason, you should always be careful to adhere to the following instructions when using your Multi-Tool.

Never hold the Multi-Tool in a way in which the cutting head is pointing towards someone else.

Never allow the cutting head to come into contact with your body.

Always turn off the engine before adjusting the Multi-Tool, or at any time when coming into close proximity with the cutting head.

Always wear thick work gloves when adjusting the Multi-Tool.

Safe Handling of Fuel



The engine of the Multi-Tool is designed to run on a two stroke oil/fuel mixture.

This fuel is highly flammable; never store cans of fuel or refill the fuel tank in any place where there is a source of heat or fire, which might ignite the fuel.

Do not smoke whilst operating the Multi-Tool or refilling, keep lit cigarettes away from the Multi-Tool at all times.

When refilling the fuel tank always stop the engine first and carefully make sure that there are no sparks or naked flames anywhere nearby before refuelling.

If any fuel spillage occurs during refuelling, use a dry rag to wipe any fuel which has been spilled onto the Multi-Tool before starting the engine.

After refuelling, screw the fuel cap back tightly onto the fuel tank and carry the Multi-Tool to a spot 5 metres or more away from where it was refuelled before starting the engine.

Before Operating the Multi-Tool

Before beginning work, carefully check the work area and remove any obstacles. Within a perimeter of 15 metres of the work area should be considered a hazardous area into which no-one should enter while the Multi-Tool is being used, and when necessary this area should be marked with a warning rope, warning signs, or other forms of warning.

When work is to be performed simultaneously by two or more operators, care should also be taken to constantly look around to check the presence and locations of other operators within the work area to maintain a safe distance between each operator.

Before beginning work, each component of the Multi-Tool should be checked to make sure that it is in proper working order, make sure that there are no loose screws or bolts, fuel leaks, ruptures, dents, broken guards or any other problems which might interfere with safe operation.

Keep all parts of your body away from the cutting head when the engine is running.

Before Starting the Engine

Carefully check the work area to make sure that no obstacles exist within a perimeter of 15 metres around the Multi-Tool before starting the engine.

To start the engine, place the Multi-Tool onto the ground in a flat clear area and hold it firmly in place to ensure that neither the cutting head nor the throttle come into contact with any obstacles when the engine starts.

After starting the engine, make sure that the cutting head stops moving when the throttle trigger is released (idle). If the cutting head continues to move when the engine is at idle, adjust the idle screw on the carburettor to a point where the cutting head stops moving, if this cannot be achieved, take the Multi-Tool to your authorised service dealer for adjustment.

Avoid Noise Problems

Check and follow the local regulations for sound levels and hours of operation for garden machinery.

In general, operate Multi-Tools between 8 am and 5 pm on week days and 9 am to 5 pm at weekends.

Avoid using the Multi-Tool late at night and/or early in the morning.

Safety when using the Multi-Tool

When using the Multi-Tool, grip the handles firmly with both hands, place your feet slightly apart so your weight is distributed evenly across both legs, and always maintain a steady even posture while working. Do not use on ladders or if the ground surface is slippery or uneven. Never attempt to cut directly overhead or with one hand.

- Maintain full engine speed when cutting.
- Never allow other persons to come within the work area as doing so might expose them to danger.
- Keep work area clear of all persons, particularly small children and pets. Injury may result from flying debris.
- If grass or other objects get caught in the Multi-Tool during operation, always stop the engine before removing the object.

- Never touch the spark plug or plug HT cable while the engine is in operation, doing so may result in an electrical shock.
- Never touch the exhaust, spark plug, or any metallic parts while the engine is in operation or immediately after shutting down the engine. These parts reach high temperatures during operation and doing so could result in serious burns.



- When you finish cutting in one location and wish to continue work in another area, stop the engine and fit the blade safety guards.
- Always remove fuel from the fuel tank before transportation to prevent fuel spillage.
- Never leave the Multi-Tool exposed to direct sunlight as this can heat the fuel tank and may cause a discharge of fuel, and flood the engine.
- Be careful not to hit the nylon cutting head against stones or the ground.

Two-Stroke Fuel



Fuel is very flammable. Do not smoke or bring any flame or sparks near fuel.

Always stop the engine and allow it to cool before refuelling.

Refuel outdoors on bare ground, restart the engine at least 5m away from the refuelling area.

The engine is lubricated by oil mixed into petrol. Prepare a mixture of unleaded petrol and semi-synthetic two-stroke oil that meets the specifications of: API TC, ISO-L-EGC, JASO FC (Low Smoke) oil.

Recommended mixing ratio is 40:1.

FUEL WITH NO OIL (RAW PETROL) will cause severe damage to the engine which is not covered by manufacturer's warranty.

Use fresh, unleaded petrol (95 RON) and semi-synthetic oil specially made for high performance two-stroke engines. Mix in a ratio of 40 parts petrol to 1 part of oil.

By using two-stroke oil specially made for two-stroke engines you will reduce the formation of ash and carbon deposits on the spark plug, piston, exhaust muffler and cylinder as well as reducing emissions of harmful exhaust gases.

Oil FOR 4-CYCLE ENGINES should not be used as two-stroke lubrication oil as it can cause fouling of the spark plug, exhaust port blocking, piston ring sticking and other internal engine damage.

NOTE

Due to increased Ethanol content in petrol we recommend the use of B3C Ethanol Shield 2-Stroke Oil, or Ethanol Shield Fuel Stabiliser to protect your MITOX® engine against the harmful effects of Ethanol.

Visit www.b3cfuel.co.uk for more information.



Fuel Storage (Without Ethanol Shield)

Mixed two-stroke fuel which has been left unused for a period of one month or more may damage the carburettor and result in the engine failing to start or operate correctly.

When storing the Multi-Tool for a period of more than one month, empty the fuel tank, and run the engine to empty the carburettor of fuel.

Two stroke fuel can cause deterioration of rubber and/or plastic components during prolonged storage.

It is important to only use good quality, fresh fuel mix.

Fuelling

Shake the fuel container to thoroughly mix the two-stroke oil and petrol.

Clean dirt from around the fuel cap before removing.

Pour two-stroke fuel into the fuel tank with a filtered funnel, up to 80% of the fuel tank's capacity.

Replace the fuel cap and tighten securely. Spilled fuel must be wiped away from the Multi-Tool before starting the engine.

Move at least 5m away from the refuelling area before restarting the engine.



When refilling the tank, always turn off the engine and allow it to cool down. Take a careful look around to make sure that there are no sparks or open flames anywhere nearby before refuelling.

Installing the Loop Handle Assembly




- Fit the upper handle to the shaft using the fixing holes to locate the handle to the desired position (smooth side of the handle facing away from the engine).
- Fit the lower handle clamp and secure using the 2 Torx bolts.

Assembly of the Brushcutter



The blade fitted to the guard is sharp and can cause injury, always wear gloves.


Installing the Guard

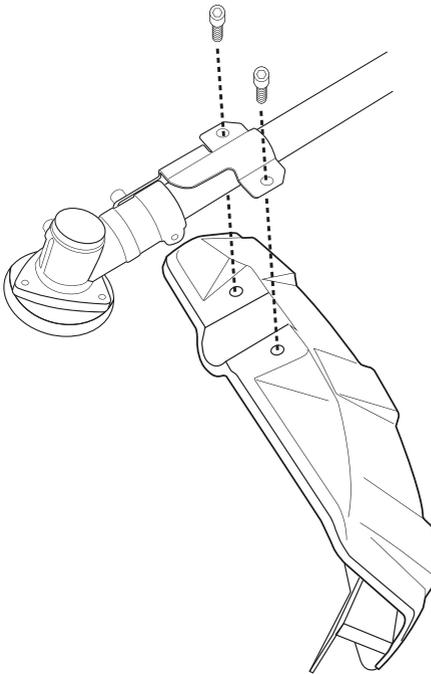


- Place the Brushcutter with the head facing down.
- Fit the shield using the bracket and 2 X Torx screws

Installing the Nylon Head


- Lay the Brushcutter on its back with the gearbox shaft facing up.

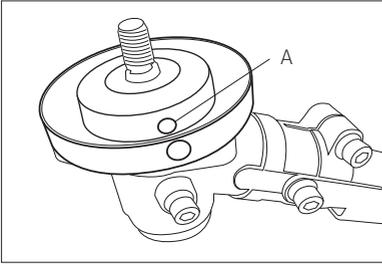


Rotate the gear box shaft until the hole in the holder A lines up with the slot in the metal guard.

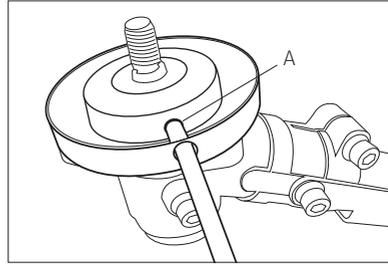

Insert an Allen key or screwdriver into the hole in the gearbox cover and into holder A.

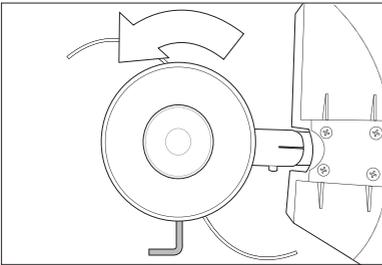


Screw the nylon head anti-clockwise (turn left) onto the threaded shaft on the end of the gearbox.

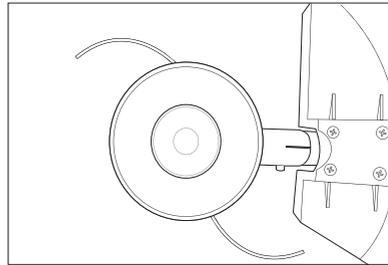


Make sure that the nylon head is securely locked in position and remove the Allen key.

Installing the 3 Point Blade


- Lay the Brushcutter on its back with the gearbox shaft facing up.




Rotate the gear box shaft until the hole in the holder A lines up with the slot in the metal guard.




Insert an Allen key or screwdriver into the hole in the gearbox cover and into holder A.




Place the 3 tooth blade on the holder A, centering the blade on the raised centre.



Fit the holder B over the blade.



Fit the domed nut protector C over holder B and the blade.




Fit the nut anti-clockwise (turn left) and tighten using the spanner provided. Remove the Allen key / screwdriver.



THE BLADE MUST BE CORRECTLY POSITIONED ON THE UPPER BLADE CLAMP OTHERWISE SERIOUS DAMAGE AND INJURY TO PERSONS AND PROPERTY COULD RESULT.

Replacing the Nylon Cord

Check to see if the nylon head is damaged before replacing the cord. If you can see serious traces of wear or damage, you must replace the complete nylon head.

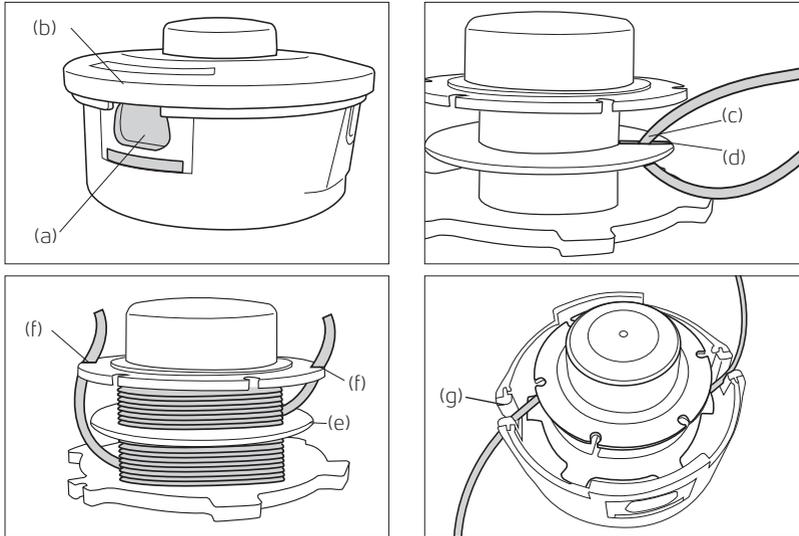

1. Stop the engine.
2. Open the nylon head by pushing on the catch, (a), and lifting the cover (b).
3. Pull the bobbin out of the nylon head and take out the rest of the nylon cords.
4. Cut a new length of cord, 2.4mm Ø and 5 metres long.
5. Fold the new cord in half and place the centre of the fold (c) into the clip (d) in the empty bobbin.
6. Wind the line in the direction of the arrows on the bobbin, with half of the line above and half below the divider (e). Maintain an even and firm tension onto the bobbin, being careful not to twist the line.
6. After winding the cord, insert both ends into the notches on the bobbin, (f).
7. Put the filled bobbin back into the carrier. Release the cords from the notches in the bobbin and place them into the eyelets in the carrier (g). The cords should stick out approx 15 cm either side.
8. Refit the spool cover (b), ensuring it is securely clicked into place.

Never use a cutting device other than those supplied by the manufacturer. (Steel cord is never allowed) Always use original spare parts in order to benefit from continuous warranty.

Using the Brushcutter

Choosing the cutting device

Choose the most suitable cutting device for the job to be done, according to these general indications:

- The cutting line head can eliminate tall grass and non-woody vegetation
- The 3-point blade is suitable for cutting brushwood and small shrubs up to 2 cm in diameter.


Nylon Head

- Cut the grass in 1.5 metre widths, keeping the machine well balanced.
- Avoid engaging stones, piles of earth, small pieces of wood or anything that could be hidden or difficult to see in the grass. If a large object is accidentally struck, if the cutting head gets blocked, overloaded or stringy material gets wrapped in the cutting head, reduce the engine speed so the engine idles. Make sure that the cutting head has stopped rotating, switch off the engine and remove the material.
- Put the brushcutter on the ground and check that the cutting head has not been damaged. If necessary, change the cutting head. If the head is only wrapped by vegetation, remove by hand and clean the cutting head.
- Always wear safety gloves for this operation and ensure the engine is switched off and the head is stationary.
- When the 2 nylon cords become too short, accelerate the engine and bump the nylon head on the ground. Automatically the 2 nylon cords will feed out and be cut to the correct length. Repeat the operation if necessary.

3-Point Blade

- Start cutting above the undergrowth and then move down with the blade so as to cut the brush into small pieces.
- Avoid hitting stones, piles of earth, small pieces of wood or anything that could be hidden or difficult to see in the grass.

Assembly of the Hedgetrimmer

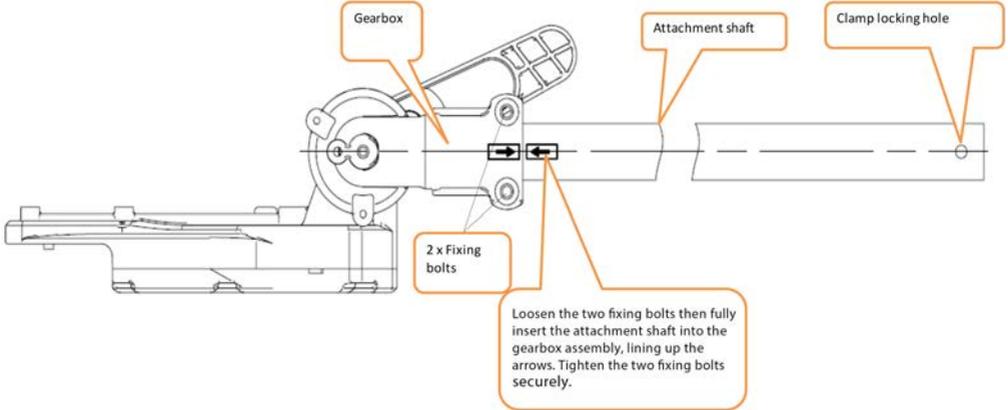

NOTE

The thickness of fresh growth (green branches), which may be cut using this hedgetrimmer, is limited to up to approximately 10mm. Never try to cut branches thicker than this, as doing so may result in damage to the hedgetrimmer.


Blade information

- Never cut hedges thicker than 10mm and only fresh growth.
- If wire is caught by the blades, damage can occur which is not covered by the warranty.
- When sharpening, removing, or reattaching the blades, be sure to wear thick, sturdy gloves and use only appropriate tools and equipment to prevent injury.
- After you have finished using the hedgetrimmer, clean the blades and apply clean light grade lubricating oil to the entire length of the blades, including the blade bolts.


Operation

Adjusting the angle of the cutting blades


1. Stop the engine.
2. Always wear gloves when adjusting the blades.
3. Lay the hedgetrimmer flat on the ground and set the guard (1) to the trimmer blade .

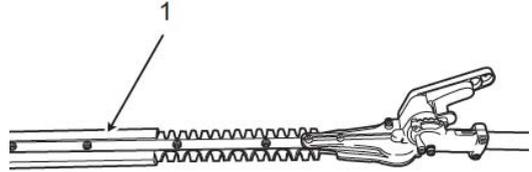


4. Squeeze the red locking lever (2) into the black handle (5) to release the locking pin (3).

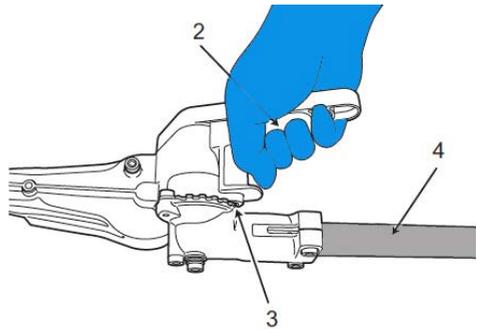

5. While holding the shaft (4), move the cutting head to the desired position.

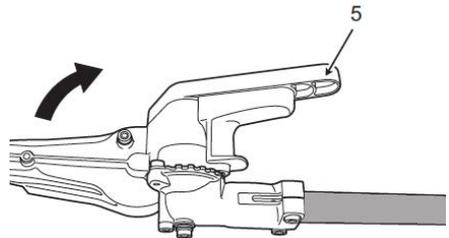


6. Release the red locking lever and ensure the locking pin (3) engages with the quadrant.

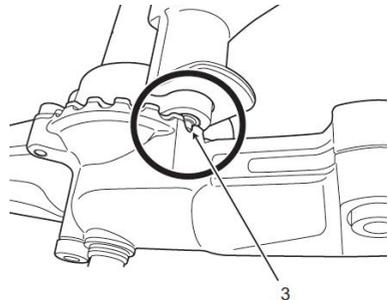

Pole Pruner Attachment

KICKBACK AND PINCHING SAFETY PRECAUTIONS



Beware of kickback!


- Kickback can occur whenever the tip of the guide bar touches an object while the saw is operating. Kickback may force the bar up and back towards the operator with speed!

Beware of pinching.

- Pinching the saw along the tip of the guide bar may force the bar back rapidly toward the operator. Pinching can occur whenever wood closes in around the moving chain.
- Both kickback and pinching may cause you to lose control of the pole pruner which could result in serious personal injury.
- Understand kickback and pinching!
- Keep a firm grip on the pole pruner with both hands whenever the engine is running. A firm grip will help you reduce the effects of kickback and pinching as well as maintain control of the machine.
- Cut at high engine speeds.
- Follow the manufacturer's instructions for sharpening and maintaining the chain.
- Use only genuine spare parts.


Assembly of the Pole Pruner

Attaching the Pruning Mechanism

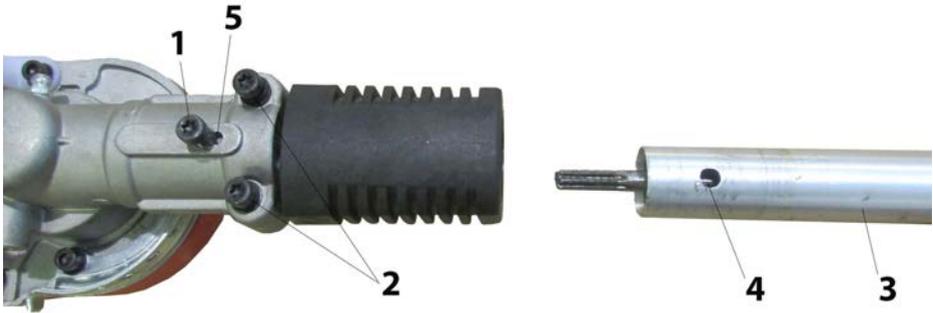


- Remove the locating screw (1).
- Using a T25 Torx key, loosen the clamping bolts (2).
- Slide the drive shaft (3) into the gearbox until the locating hole (4) in the drive shaft is visible through the locating hole in the gearbox (5).
- Insert the locating screw (1) into the gearbox and tighten.
- Using a T25 Torx key, tighten the clamping bolts (2).

Install the guide bar and the saw chain on the gearbox as follows:

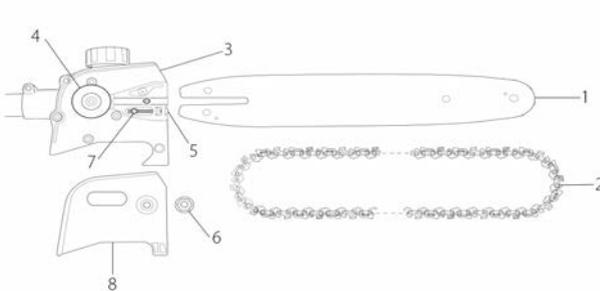


- | | |
|-----|----------------------------|
| (1) | Guide bar |
| (2) | Saw chain |
| (3) | Gearbox |
| (4) | Sprocket |
| (5) | Chain tension adjust screw |
| (6) | Nut |
| (7) | Chain tensioner |
| (8) | Chain cover |

The saw chain has very sharp edges. Use protective gloves for safety.

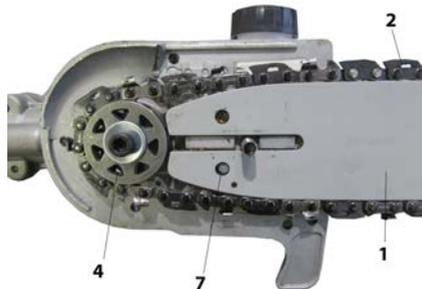

- Loosen the nut (6), and remove the chain cover (8).
- Mount the guide bar (1), then fit the saw chain around the bar and sprocket (4).
- **Pay attention to the correct direction of the saw chain (2).**
- Fit the chain tensioner (7) into the lower hole of the guide bar.

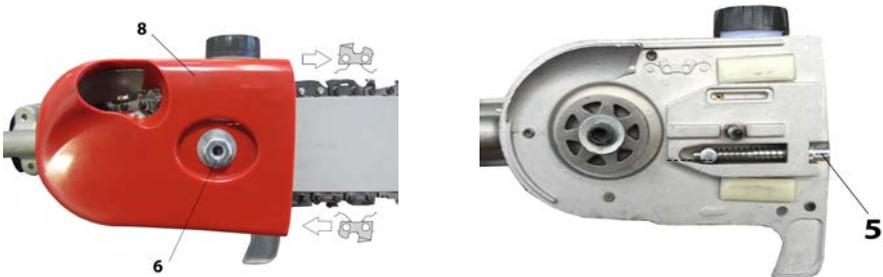

- Install the chain cover (8), and fasten the mounting nut (6) to finger tightness.
- Turn the adjuster screw (5) clockwise until the chain does not sag from the underside of the guide bar.
- Fully tighten the chain cover nut (6).
- Wearing protective gloves, pull the chain around the guide bar by hand to check that the chain has the correct tension, without any tight spots.

It is important to maintain the proper chain tension. Rapid wear of the guide bar or the chain coming off can be caused by improper tension, especially when using a new chain.

Chain Oil

Filling the Oil Reservoir

- Fill the chain oil tank with low viscosity chain oil or Mitox Chain Oil this is available online at www.mitox.co.uk or at your local dealer.




 **NOTE**

- Do not use waste or regenerated oil that can cause damage to the oil pump.
- The oil reservoir has a capacity sufficient to provide about 20 minutes of cutting time. Be sure to refill the oil tank every time when refuelling the saw.

Checking the Oil Supply

- After starting the engine, run the chain at medium speed and see if chain oil is thrown off as shown.

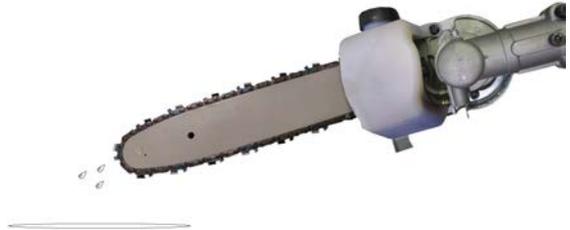

Adjusting the Oil Flow Rate

 **WARNING**

Never fill the oil reservoir or adjust the oiler with the engine running.

- An increase in bar oil flow rate will speed oil consumption, requiring more frequent checks on the oil reservoir.
- The guide bar and chain are lubricated automatically by a pump that operates whenever the chain rotates. The pump is set at the factory to deliver a minimum flow rate, but it can be adjusted in the field. A temporary increase in oil flow is often desirable when cutting hardwood.





- When storing the pole pruner attachment, to prevent oil from seeping through the pump, either
 - 1) Empty the oil tank.
 - 2) Lay the pole pruner attachment with the tank facing down.

Operation

Adjusting the angle of the cutter head

- Stop the engine.
- Always wear gloves when adjusting the cutter head.
- To adjust the angle of the blade pull the locking lever (1) back to release the locking pin from the metal angle selector (2).
- Move the gearbox (3) to the desired angle and release the locking lever (1).

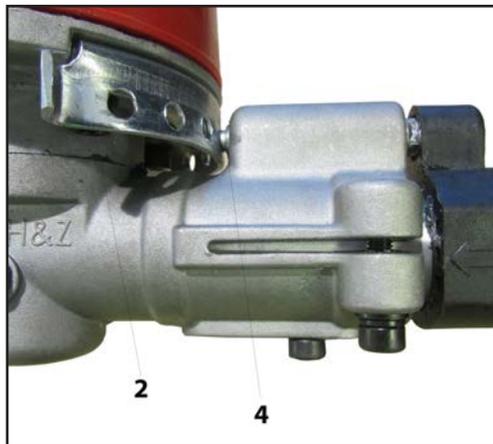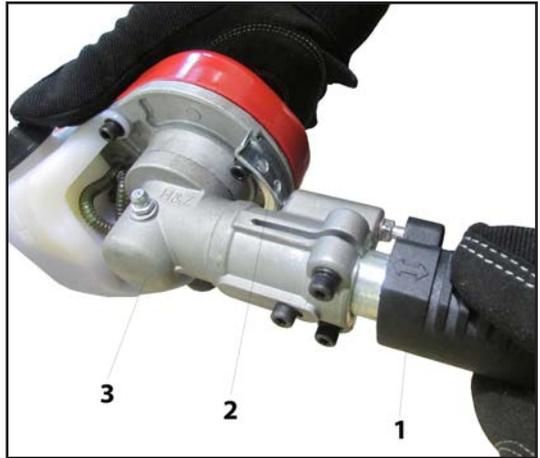

- Ensure the locking pin (4) is securely located in the angle selector (2) before using.

Maintenance of the Pruner Attachment


Oiling Port

- Dismount the guide bar and check the oiling port for blockage (1).




Guide Bar

- Remove sawdust in the bar groove (1) and the bar oiling port (2).
- Grease the nose sprocket (3) from the feeding port on the tip of the bar (4) with a sprocket grease gun (Oregon Part Number 21939).

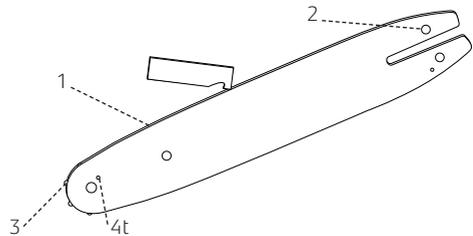

Gearbox

- Apply 2 or 3 pumps of grease every 15 hours of operation via the grease port (1).
- DO NOT force grease into the gear box.
- Always use lithium based grease.

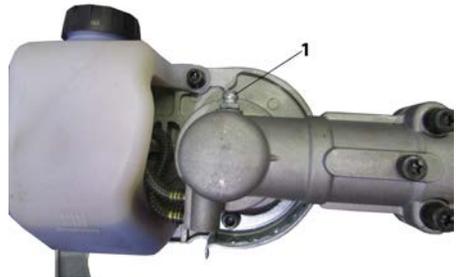

Saw Chain Sharpening



It is very important for smooth and safe operation to always keep the chain sharp.

The chain needs to be sharpened when:

- Sawdust becomes powder-like.
- You need extra force to saw.
- The cut does not go straight.



Be sure to wear safety gloves.

- Remove pruner attachment from the power unit.
- Clamp the guide bar in a vice to secure.
- Sharpen the chain with a 5/32 file and holder (Oregon part number 16265)
- Place your file on the cutter and push straight forward. Keep the file position as illustrated (a).
- After every cutter has been set, check the depth gauge and file it to the proper level as illustrated (b).
- Make sure every cutter has the same length and edge angles as illustrated (c).

(1) Depth gauge set tool (Oregon part no 27530)

(2) File shoulder round




(3) Depth gauge standard

(4) Cutter length


(5) Filing angle

(6) Side plate angle

(7) Top plate cutting angle

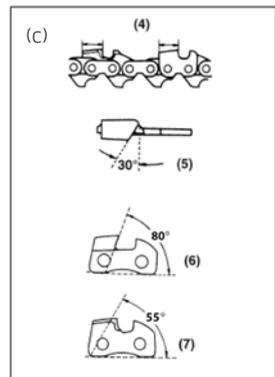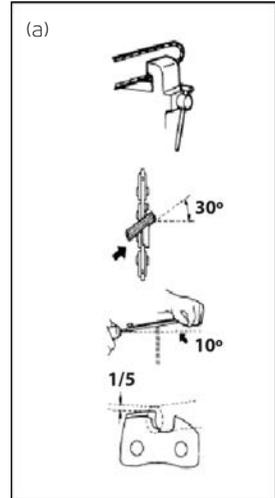

Installing the Attachments to the Power Unit (or Optional Extension Shaft)

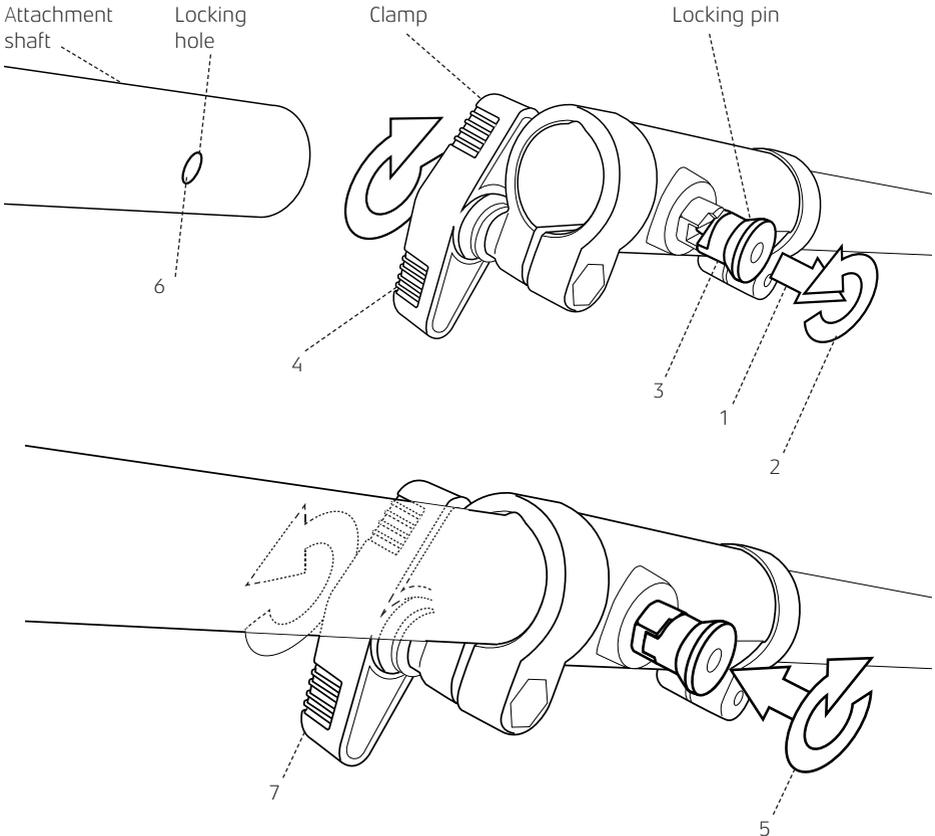

- Pull out the locking pin (1) and twist (2) to lock in the outer position (3).
- Loosen the clamp by turning the handle (4).
- Insert the attachment shaft, lining up the locking hole with the locking pin .
- Twist the locking pin (5) to release it from the outer position. You may need to twist the attachment shaft to ensure that the locking pin engages with the locking hole (6).
- Tighten the clamp by turning the handle (7).

Operation

Keep clear of the cutter head as it may start moving when the engine starts.

Starting the Engine

CAUTION do not pull the starter cord all the way out and do not let go of the starter handle when the cord is extended, this can damage the starter mechanism.

Cold Engine Starting

Rest the unit on a flat, firm surface. Keep the cutting head off the ground and clear of surrounding objects as it may start moving when starting the engine.

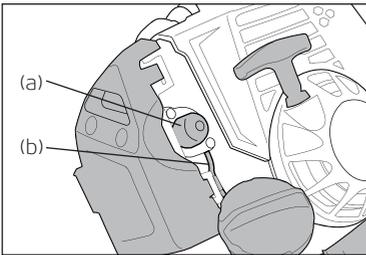


Fig 1 - Push the air purge bulb (a) until fuel is visible in the clear return fuel line (b)

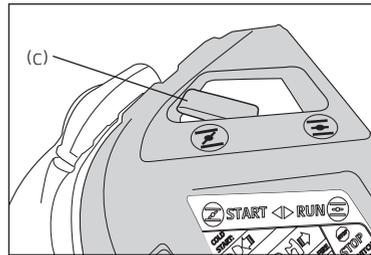


Fig 2 - Move the choke lever (c) to the START () position.

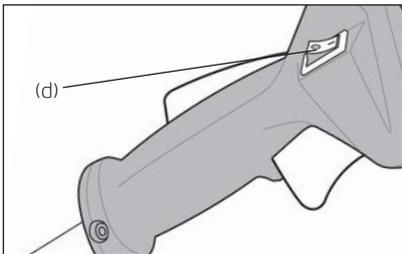


Fig 3 - Set the ignition switch (d) to the START (I) position.

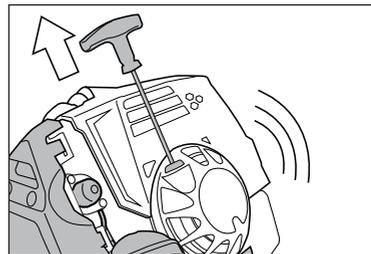


Fig 4 - While holding the unit, pull out the starter rope firmly until the engine fires (indicated by a 'cough' from the engine).

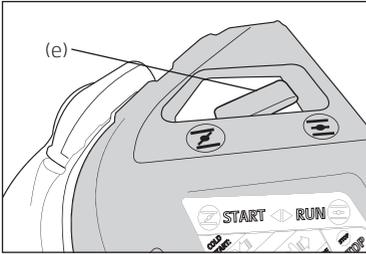


Fig 5 - Move the choke lever (e) to the RUN (|||) position.

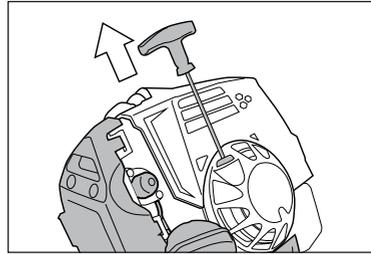


Fig 6 - Pull the starter rope until the engine starts, then squeeze the throttle briefly to release the fast idle control and return the engine to idle.

Allow the engine to warm up before use. When cutting, always use the Multi-Tool on full throttle.

Hot Engine Starting

- Set the ignition switch to the START (I) position (fig 3 page 29).
- Check the clear return fuel line. If the line is empty, push the air purge bulb until fuel is visible in the clear return fuel line.
- Move the choke lever to the START (|||) position, then back to the CLOSED (|||) position. This will set the throttle to the hot start position.
- Pull the starter rope until the engine starts, then squeeze the throttle briefly to release the fast idle control and return the engine to idle.
- If the engine does not start after 5 pulls, use the Cold Start procedure.

Overchoking

Should the engine become flooded due to overchoking, turn the ignition switch off, unscrew the spark plug, wipe it dry or replace.

Stopping the Engine



Set the engine to idling by releasing the throttle lever.

Set the ignition switch to the off position "O" (STOP).

If the engine fails to stop, set the choke lever to the closed position to stall the engine; do not use the machine until the ignition switch is repaired.

Running In

During the first ten hours of work, avoid running the engine at maximum speed for a prolonged period until all the components have bedded in, after the engine has been run in, it will reach its maximum power.

Transportation

Never transport the Multi-Tool with the engine running. An engine that is running could be accidentally accelerated causing the cutter head to engage.

Make sure the blade safety guards are in place when transporting the Multi-Tool.

When carrying by hand, the cutting head should be pointing backwards.

Ensure the Multi-Tool is secure when transporting in a vehicle and the tank is drained of fuel.

Maintenance

IMPORTANT

After every use, check that all nuts, bolts and screws are securely fastened and tighten if necessary.


In the event of an accident, breakdown or blockage, ensure the engine is turned off before any work is carried out to rectify this.

Make sure the engine has stopped and is cool before performing any service to the machine.


Contact with a moving cutting head or hot muffler may result in a personal injury.

Fuel Filter

Every 15 hours of operation, using a wire hook, take the fuel filter from the fuel tank and clean or replace with a new fuel filter.

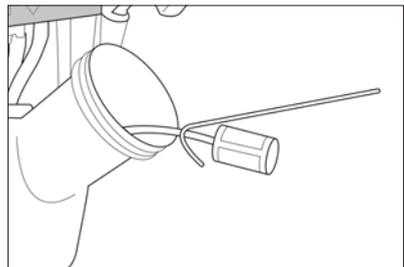

Carburettor

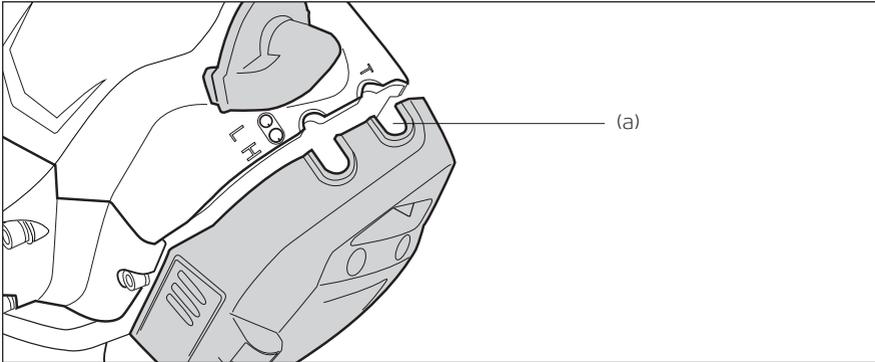


The carburettor mixture setting has been set at the factory and will not need adjusting.

Adjusting the idle speed: If adjustment is necessary turn the T screw (a) clockwise until the cutting head starts to move, then turn the T screw anticlockwise until the cutting head stops.

If the idle speed cannot be adjusted to stop the cutting head moving at idle, contact your dealer for repair before use.

Safety Lock

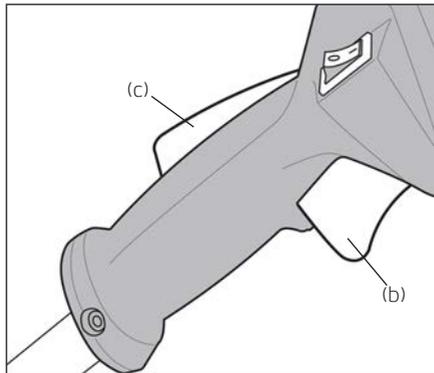


The safety lock is to prevent the throttle lever from accidentally being engaged. The throttle lever (b) can only be pressed in if the safety lock (c) is held down. Check if the safety lock and throttle levers return to their original position and the engine returns to idling when you release your hand from the handle.


Any defects contact your nearest service agent for repairs before using the machine.

Spark Plug

Poor starting or misfiring is often caused by a fouled or defective spark plug, clean and reset the gap to 0.65 mm, or replace the spark plug with LD L8RTF; CHAMPION RCJ7Y; NGK BPMR7A as necessary.

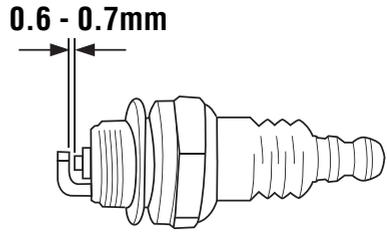

Air Filter

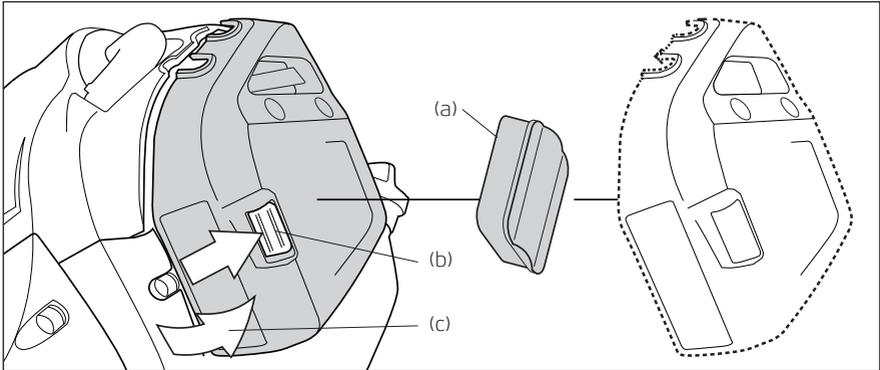

Before using the Multi-Tool, check the air filter (a). Being clogged, will reduce the engine performance. Remove the air filter cover by pressing on the filter cover release (b) and opening the filter cover (c). Clean the filter element in warm, soapy water, dry completely before installing. If the element is broken or shrunk, replace with a new one.

Storage

- Remove the spark plug, pour a small amount of oil into the cylinder. Rotate the crankshaft several times using the starting rope in order to distribute the oil. Put the spark plug back in.
- Remove the fuel from the machine.
- Check the Multi-Tool for damage or problems at the intervals shown in the service schedule.


Hedgetrimmer Blades

- After each session of operation, oil the cutting blades with light oil.

Gearbox Lubricant

- DO NOT force grease into the gear boxes, apply 2 or 3 pumps of grease every 15 hours of operation.

Brushcutter Gear Case

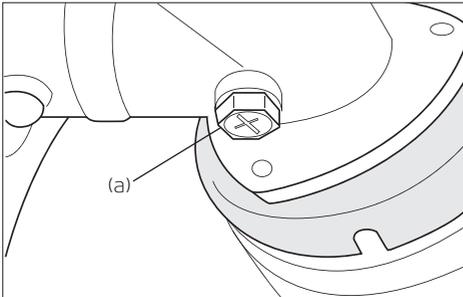

- Remove the bolt (a) on the gear case, top up the gearbox using Lithium grease and refit the bolt.

Troubleshooting

Engine will not start, power loss:

- Check that the fuel tank is not empty. Fill with mixed fuel.
- The fuel does not reach the carburettor. Change the fuel filter in the fuel tank.
- There is water in the fuel. Drain and clean the fuel system.
- The air filter is dirty. Clean or replace the air filter.
- There are carbon deposits in the exhaust muffler restricting the engine. Clean or change the muffler.
- Spark plug is worn. Replace spark plug.

Service Schedule

	Component	Procedure	Before use	Every 15 Hours	Every 25 Hours	Every 50 Hours	Note
Engine	Fuel leaks / spillage	Wipe up					
	Fuel tank / filter	Inspect / clean		X			Replace if necessary
	Idle adjust screw	See above	X		X		Adjust carburettor if necessary
	Spark plug LD L8RTF/ CHAMPION RCJ7Y / NGK BPMR7A	Clean and readjust plug gap		X			GAP .025" (0.6-0.7mm) Replace, if necessary
	Cylinder fins / Intake air cooling vent	Clean		X			
	Air filter	Clean	X				
	Muffler, Spark arrestor / cylinder exhaust port	Clean				X	
Shaft	Throttle lever / ignition switch	Check operation	X				
	Screws / nuts / bolts	Tighten / replace	X				Not adjustment screws
	Gear Case	Check		X			
Pole Pruner	Oiling Port	Clean	X				
	Guide Bar	Clean	X				
	Sprocket	Inspect/ Replace			X		
	Saw Chain	Inspect/ Replace	X				
LRH	Blade	Grease		X			
	Blade	Lubricate	X				

Specifications

MODEL MITOX 28MT		
Engine	Type	Air cooled 2-stroke gasoline engine
	Model	IE34F-4A
	Displacement : (cm3)	25.4 cc
	Max. output	0.75 (kw) in accordance with ISO 8893
	Idle speed: rpm (min -1)	3100±400
	Max. rpm (min -1)	9000
	Fuel tank capacity	0.60L
	Fuel	Mixture (petrol 40 : Oil 1)
	Carburettor	Diaphragm type
	Spark Plug	LD L8RTF; CHAMPION RCJ7Y; NGK BPMR7A
Transmission		Centrifugal clutch
Fixation hole diameter: (mm)		25.4
Weight (Power Unit Only)		4.63kg


EX-BC (When used as a Brushcutter)			
Weight (Power Unit & Attachment)		6.51kg	
Weight (Attachment Only)		1.88Kg	
Reduction ratio		22 : 17	
Cutting head	Cutting width	3 tooth blade	255mm
		Nylon head	415mm
	3 tooth blade thickness		1.4mm
	Cutting line diameter		2.4mm
	Max. blade rotation speed:		7500 rpm (min -1)
	Rotation direction		Counter clockwise (as seen from above)

Specifications

EX-LRH (When used as a long reach hedge trimmer)		
Weight (Power Unit & Attachment)		7.31kg
Weight (Attachment Only)		2.68kg
Tooth Spacing		27mm
Reduction ratio		4 : 1
Cutting head	Type	Reciprocating double blade
	Effective cut Length	510mm

EX-PS (When used as a pruner saw)		
Weight (Power Unit & Attachment)		6.70kg
Weight (Attachment Only)		2.07kg
Reduction ratio		0.94
Cutting head	Guide bar size	10inches (250mm)
	Saw chain Pitch x Gauge	3/8x0.050"
	Oil pump	Plunger type
	Sprocket	7T

Parts Diagram - Engine

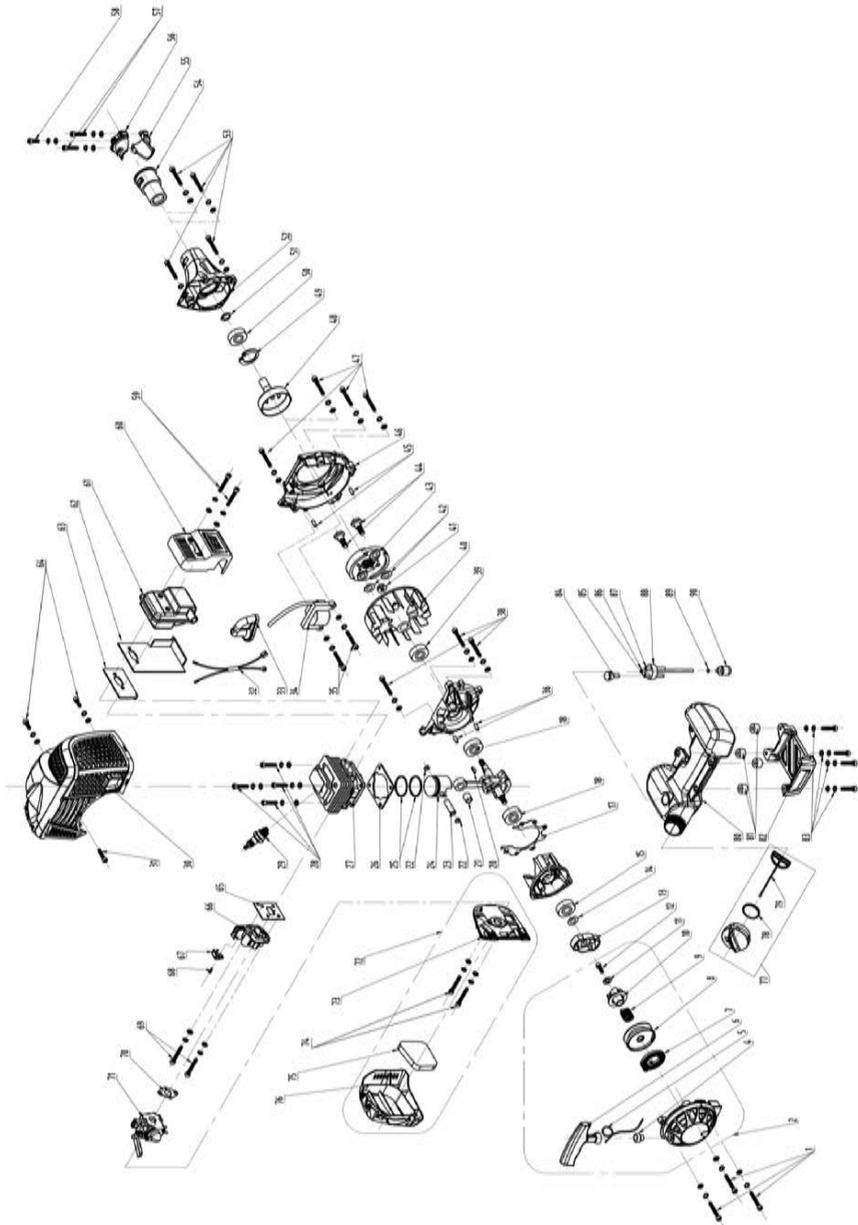

Parts List - Engine

ID No.	Part Number	DESCRIPTION
1	MIGB/T2671.2 M5X12	SCREW M5X12
2	MITBC261D.01.12.00-00	STARTER ASSEMBLY
4	MIYD25.02.01-2	ROPE GUIDE
5	MIYD25.02.00-5	STARTER ROPE
6	MIYD62.02.00-3	STARTER HANDLE
7	MITBC261D.01.12.00-5	RECOIL SPRING
8	MITBC261D.01.12.00-4	RECOIL PULLEY
9	MITBC261D.01.12.00-6	STARTER SPRING
10	MITBC261D.01.12.00-7	RATCHET WHEEL
11	MIGB/T97.1 M5	WASHER M5
12	MIGB/T845 ST4.8X16	TAPPING SCREW ST4.8X16
13	MITBC260D.01.00.02-00	STARTER RATCHET ASSY
14	MIGB/T97.1 M8	FLAT WASHER M8
15	MIYD38-3.01.01.02-00	OIL SEAL 12X22X7
17	MITBC260D.01.01.00-3	GASKET - CRANKCASE
18	MIGB/T276 6001	BEARING 6001
20	MIGB/T1099 3X3.5X10	SEMI-CIRCULAR KEY 3X3.5X10
21	MITBC260D.01.03.03-00	BEARING 6001 8x11x11
22	MIYD38-3.01.03.00-4	PISTON PIN CIRCLIP
23	MIGJB25D.01.03.00-2	PISTON PIN
24	MIGJB25D.01.03.02-00	PISTON
25	MIGJB25D.01.03.00-1	PISTON RING
26	MITBC260D.01.00.00-4	GASKET - CYLINDER
27	MITBC261D.01.00.00-1	CYLINDER
28	MIGB/T2671.2 M5X20	SCREW M5X20
29	SPBPMR7A	SPARK PLUG (EQUIV BPMR7A)
30	MITBC261D.01.00.00-2	ENGINE COVER
31	MIGB/T845 ST4.8X16	TAPPING SCREW ST4.8X16
32	MITBC260D.01.11.02-00	WIRE
33	MITBC431D.01.11.00-1	SPARK PLUG COVER

Parts List - Engine

ID No.	Part Number	DESCRIPTION
34	MITBC260D.01.11.01-00	IGNITION COIL
35	MIGB/T2671.2 M5X20	SCREW M5X20
36	MIGB/T119.2 5X10	PIN 5X10
38	MIGB/T2671.2 M5X25	SCREW M5X25
39	MIYD38-3.01.01.02-00	OIL SEAL 12X22X7
40	MITBC260D.01.10.00-00	FLYWHEEL
41	MIGB/T6177.2 M8X1	NUT M8X1
42	MIGJB25D.01.00.00-15	WAVE SPRING WASHER
43	MITBC260D.01.00.03-00	CLUTCH ASSEMBLY
44	MIGJB25D.01.00.00-14	BOLT FOR CLUTCH
45	MIGB/T119.2 4X10	PIN 4X10
46	MITBC261D.01.01.00-4	FAN COVER
47	MIGB/T2671.2 M5X20	SCREW M5X20
48	MITBC260D.01.14.01-00	CLUTCH DRUM ASSEMBLY
49	MIGB/T893.1 35	CIRCLIP (SIZE 35)
50	MIGB/T276 6202	BALL BEARING 6202-2Z
51	MIGB/T894.1 15	STOP RING (SIZE 15)
52	MITBC261D.01.14.00-1	CLUTCH DRUM HOUSING
53	MIGB/T2671.2 M6X20	SCREW M6X20
54	MITBC430D.01.14.00-2	ANTIVIBE RUBBER
55	MITBC430D.01.14.00-4	CLAMP RH
56	MITBC430D.01.14.00-3	CLAMP LH
57	MIGB/T2671.2 M5X25	SCREW M5X25
58	MIGB/T2671.2 M5X12	SCREW M5X12
59	MIGB/T2671.2 M5X52	SCREW M5X52
60	MITBC226D.1-2	MUFFLER COVER
61	MITBC261D.01.09.00-00	MUFFLER
62	MITBC261D.01.00.00-8	GASKET
63	MITBC260D.01.00.00-6	GASKET - MUFFLER
64	MIGB/T2671.2 M4X12	SCREW M4X12
65	MITBC260D.01.00.00-5	GASKET
66	MITBC261D.01.00.01-00	MANIFOLD

Parts List - Engine

ID No.	Part Number	DESCRIPTION
67	MITBC431D.01.00.00-12	STRAP
68	MIGB/T845 ST3.5X9.5	ST SCREW 3.5X9.5
69	MIGB/T2671.2 M5X20	SCREW M5X20
70	MITBC261D.01.00.00-4	GASKET / CARBURETTOR
71	MITBC261D.01.06.00-00	CARBURETTOR
72	MITBC261D.01.08.00-00	AIR FILTER ASSEMBLY
74	MIGB/T2671.2 M5X45	SCREW M5X45
75	MITBC261D.01.08.00-3	AIR BOX ASSEMBLY
77	MITBC431D.01.13.01	FUEL CAP ASSY
78	MITBC431D.01.13.01-3	PETROL CAP RUBBER
79	MITBC431D.01.13.01-2	STOPPER
80	MITBC261D.01.13.00-1	FUEL TANK
81	MITBC431D.01.13.00-2	FUEL TANK RUBBER
82	MITBC261D.01.00.00-7	FUEL TANK BRACKET
83	MIGB/T2671.2 M5X25	SCREW M5X25
84	MIYD45.03.04-00	BREATHER ASSY
85	MITBC431D.01.13.00-6	BREATHER PIPE
86	MITBC430D.01.13.00-4	FUEL PIPE
87	MITBC430D.01.13.00-5	RETURN PIPE
88	MITBC431D.01.13.00-3	GROMMET
89	MIYD45.01.01.01-3	CIRCLIP
90	MITD38-3.03.04-00	FUEL FILTER

Parts List - Body

ID No.	Part Number	DESCRIPTION
1	MITBC431D.02.00-3	CLAMP
2	MITBC430D.03.02-00	HARNESS CLAMP ASSEMBLY
3	MIGB/T2671.2 M5X20	SCREW M5X20
4	MITBC430D.03.00-2	CLAMP
5	MIGB/T6170 M5	NUT M5
6	MITBC431SJ.03.02-00	OUTER SHAFT - UPPER
7	MITBC431DJ.03.03-00	COUPLING ASSEMBLY
8	MIGB/T2671.2 M5X25	SCREW M5X25
9	MIGB/T2671.2 M5X12	SCREW M5X12
10	MIGB/T5781 M6X50	BOLT M6X50
11	MIGB/T96 M6	WASHER M6
12	MITBC431DJ.03.03-7	LOCK KNOB
13	MIGB/T923 M6	NUT M6
14	MITBC431DJ.03.03-3	LOCK ASSY
15	MITBC431M.03.01-02	DRIVE SHAFT
16	MITBC431M.03.01-00	EXTENSION ASSEMBLY
17	MITBC431DJ.03.01-2	LIMIT SLEEVE
18	MITBC431DJ.03.03-00	COUPLING ASSEMBLY
19	MIGB/T2671.2 M5X25	SCREW M5X25
20	MIGB/T2671.2 M5X12	SCREW M5X12
21	MIGB/T5781 M6X50	BOLT M6X50
22	MIGB/T96 M6	WASHER M6
23	MITBC431DJ.03.03-7	LOCK KNOB
24	MIGB/T923 M6	NUT M6
25	MITBC431DJ.03.03-3	LOCK ASSY
26	MITBC431DJ.03.01-2	LIMIT SLEEVE
27	MITBC431DJ.03.01-00	FRONT SHAFT ASSEMBLY
28	MITBC430DJ.03.00-1	DRIVE SHAFT
29	MITBC431D.04.00-00	GEAR BOX ASSEMBLY
30	MIGB/T894.1 10	CIRCLIP (SIZE 10)
31	MIGB/T893.1 26	E CLIP (SIZE 26)


Parts List - Body

ID No.	Part Number	DESCRIPTION
32	MIGB/T276 6000-2Z	BALL BEARING 6000-2Z
33	MITBC430D.04.00-2	PINION
34	MITBC431D.04.00-1	GEAR BOX
35	MITBC430D.04.00-7	GUARD
36	MIGB/T70.1 M5X8	SCREW M5X8
37	MIGB/T276 6000-2Z	BALL BEARING 6000-2Z
38	MITBC430D.04.00-4	GEAR
39	MITBC431D.04.00-3	GEAR SHAFT
40	MIGB/T276 6002-2Z	BALL BEARING 6002-2Z
41	MIGB/T893.1 32	CIRCLIP 32
42	MITBC431D.04.00-6	BLADE CLAMP - LOWER
43	MITBC431D.04.00-5	BLADE CLAMP - UPPER
44	MITBC431D.04.00-8	NUT PROTECTOR
45	MIGB/T6177.2 M10X1.25	NUT 10X1.25 LH
46	MIGB/T70.1 M6X12	SCREW M6X12
47	MIGB/T2671.2 M6X12	SCREW M6X12
48	MIGB/T2671.2 M6X25	SCREW M6X25
49	MITBC431D.06.01-1	SKIRT
50	MIGB/T845 ST4.8X13	TAPPING SCREW ST4.8X13
51	MITBC431D.06.00-2	LINE CUTTER
52	MITBC431D.06.02-00	DEBRIS GUARD
53	MITBC431D.06.00-3	SLEEVE
54	MITBC430D.06.00-1	CLAMP 26MM
55	MIGB/T2671.2 M6X20	SCREW M6X20
56	MITBC431S.05.01-1	FRONT HANDLE
57	MIGB/T6170 M5	NUT M5
58	MITBC431S.05.01-2	HANDLE BASE
59	MITBC431S.05.01-3	HANDLE CLAMP
60	MITBC431S.05.01-4	HANDLE BAR
61	MIGB/T2671.2 M5X28	SCREW M5X28
62	MIGB/T93 M5	SPRING WASHER M5

Parts List - Body

ID No.	Part Number	DESCRIPTION
63	MIGB/T97.1 5X12X1.5	WASHER 5X12X1.5
64	MIGB/T97.1 5X11X2	WASHER 5X11X2
65	MIGB/T97.1 5X12X1.5	WASHER 5X12X1.5
66	MIGB/T845 ST4.8X19	TAPPING SCREW ST4.8X19
67	MI03.06.1.075	FOAM GRIP
68	MITBC430DJ.03.00-1	DRIVE SHAFT
69	MIGB/T6170 M5	NUT M5
70	MITBC431S.05.02-5	SPRING
71	MITBC431S.05.02-8	WIRE A
72	MITBC431S.05.02-9	WIRE B
73	MITBC431S.05.02-10	CONDUIT
74	MITBC431S.05.02-7	THROTTLE CABLE
75	MIGB/T2671.2 M5X14	SCREW M5X14
76	MIGB/T845 ST3.5X9.5	ST SCREW 3.5X9.5
77	MIGB/T845 ST4.2X10	ST SCREW 4.2X10
78	MIGB/T2671.2 M5X14	SCREW M5X14
79	MITBC431S.05.02-4	THROTTLE TRIGGER
80	MIYD38-3.01.11.04-00	ON/OFF SWITCH
81	MITBC431S.05.02-3	LOCK TRIGGER
82	MITBC431S.05.02-6	LOCK SPRING
83	MITBC431S.05.02-00	THROTTLE ASSEMBLY
84	MITBC431D.02.00-2	BLADE COVER
85	MITBC431D.02.00-1	BLADE
86	MIC43.0100.0300	NYLON HEAD ASSY
87	MITBC430D.07.01-00	HARNESS

Parts Diagram - Hedgetrimmer

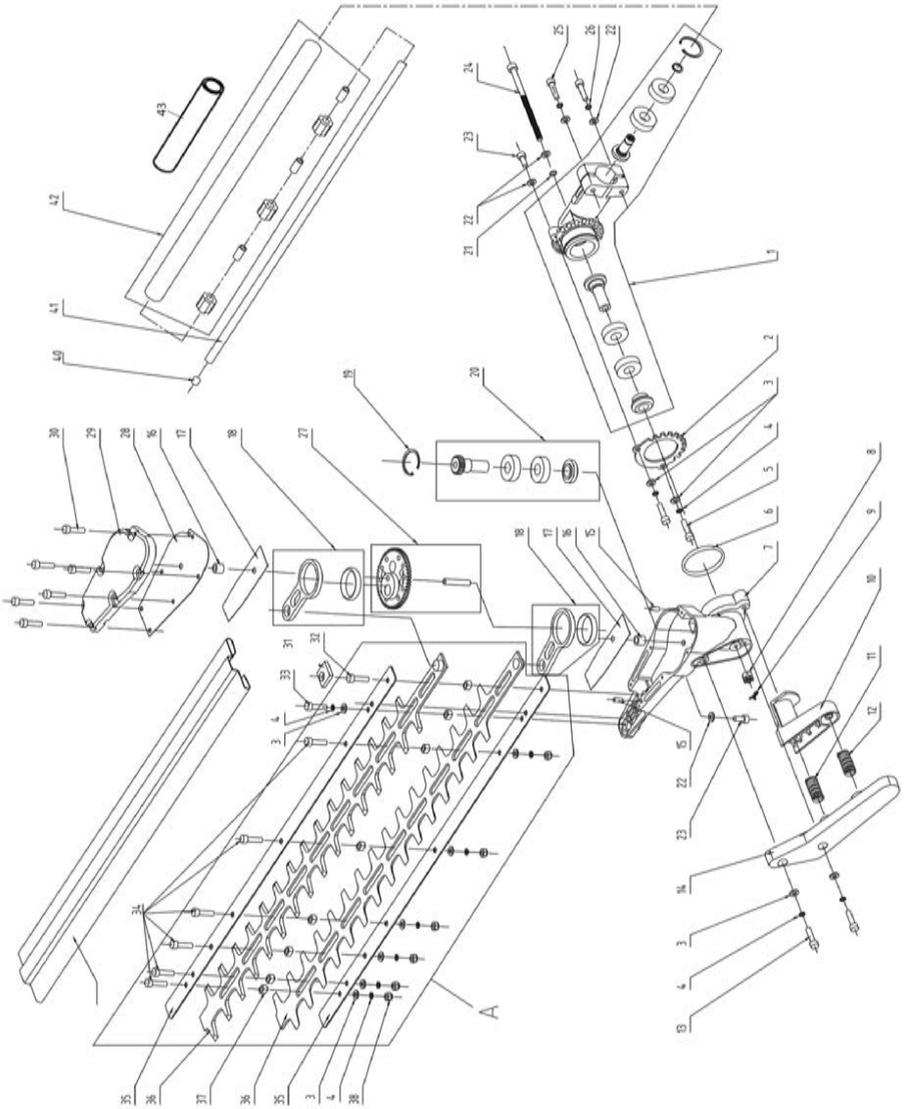

Parts List - Hedgetrimmer

ID No.	Part Number	DESCRIPTION
1	MIC26.1615.0100	RIGHT GEAR BOX ASSEMBLY
2	MIC26.1615.0103	POSITIONAL PLATE
3	MIGB/T97 M5	FLAT WASHER M5
4	MIGB/T93 M5	SPRING WASHER M5
5	MIGB/T2671.2 M5X16	SCREW M5X16
6	MIGB/T3452.1 34.5X1.8	O-RING 34.5X1.8
7	MIC26.1615.0201	LEFT GEAR BOX
8	MIGB6178 M6	NUT M6
9	MIGB91 2X14	COTTER PIN 2X14
10	MIC26.1615.0002	LEFT HALF HANDLE
11	MIC26.1615.0012	SMALL SPRING
12	MIC26.1615.0013	LARGE SPRING
13	MIGB/T2671.2 M5X20	SCREW M5X20
14	MIC26.1615.0001	RIGHT HAND HANDLE
15	MIGB/T119 B4X10	PIN B4X10
16	MIGB/T290 6X10X9	NEEDLE BEARING
17	MIC26.1615.0005	SUBPLATE
18	MIC26.1615.0006	CONNECTING ROD
19	MIGB893.1 28	28 CIRCLIP
20	MIC26.1615.0202	GEAR BOX ASSEMBLY 2
21	MIGB/T3452.1 6X1.8	O-RING 6X1.8
22	MIGB/T97 M6	FLAT WASHER 6
23	MIGB/T2671.2 M6X12	SCREW M6X12
24	MIC26.1615.0107	SCREW
25	MIGB/T2671.2 M6X30	SCREW M6X30
26	MIGB/T93 M6	SPRING WASHER M6
27	MIC26.1615.0008	GEAR BOX ASSEMBLY 3
28	MIC26.1615.0004	SEALING GASKET
29	MIC26.1615.0003	GEAR BOX COVER
30	MIGB/T2672 M4X16	SCREW M4X16
31	MIC26.1615.0011	FELT SEALING GASKET

Parts List - Hedgetrimmer

ID No.	Part Number	DESCRIPTION
32	MIGB/T2672 M5X25	SCREW M5X25
33	MIGB/T2671.2 M5X25	SCREW M5X25
34	MIGB/T2671.2 M5X18	SCREW M5X18
35	MIC26.1615.0302	MOUNTED PLATE
36	MIC26.1615.0301	BLADE
37	MIC26.1615.0303	BUSHING
38	MIGB/T889.1 M5	NUT M5
39	MIB25.0119.0002	BLADE STRIP
40	MIC43.1212.0001	LIMIT SLEEVE
41	MIC43.0212.0001	DRIVE SHAFT
42	MIC43.1212.0100	FRONT ALU PIPE ASSEMBLY
43	MI03.06.1.075	FOAM GRIP
A	MIC26.1615.0300	BLADE ASSEMBLY

Parts List - Pole Pruner

ID No.	Part Number	DESCRIPTION
1	MITBC431DJ.03.01-00	FRONT SHAFT ASSEMBLY
2	MIGB/T2671.2 M5X12	SCREW M5X12
3	MIC33.0614.0001	OIL TANK
4	MIC33.0614.0002	OIL CAP
5	MIC33.0614.0003	CHECK VALVE
6	MIC33.0614.0004	FUEL HOSE CONNECTOR
7	MIC33.0614.0005	OIL TUBE
8	MIC33.0614.0006	FUEL HOSE SPRING
9	MIC33.0614.0100	GEAR BOX ASSEMBLY
10	MIC33.0614.0004	FUEL HOSE CONNECTOR
11	MIC33.0614.0007	TENSION BLOCK
12	MIC33.0614.0008	SPRING
13	MIC33.0614.0009	TENSION SCREW
14	MIGB/T899 M6X30	DOUBLE END STUDS M6x30
15	MI100SDEA318	GUIDE BAR
16	MI91P040X	SAW CHAIN
17	MIGB/T6177.1 M6	NUT M6
18	MIC33.0614.0010	SPROCKET COVER
19	MIGB/T2671.2 M6X16	SCREWM6X16
20	MIGB/T97.1 M6	PLATE WASHER 6
21	MIC33.0614.0011	SPROCKET 3/8"
22	MIC33.0614.0012	SLEEVE 12x17x4
23	MIC33.0614.0013	PANEL
24	MIC33.0614.0014	POSITIONAL IRON SHELF
25	MIGB/T 276 6001	BEARING 6001
26	MIGB/T2671.2 M6X8	SCREWM6X8
27	MIC33.0614.0015	SLEEVE12x17x7.7
28	MIC33.0614.0016	GUIDE SLEEVE
29	MIGB895.2 5	CLAMP
30	MIC33.0614.0017	PIN SPRING CIRCLIP
31	MIC33.0614.0018	PIN SPRING

Parts List - Pole Pruner

ID No.	Part Number	DESCRIPTION
32	MIC33.0614.0019	M10 PIN GUIDING NUT
33	MIC33.0614.0020	HANDLE PIN
34	MIC33.0614.0021	GUIDE BLOCK
35	MIGB/T2671.2 M5X25	SCREW M5X25
36	MIGB/T2671.2 M5X12	SCREW M5X12
37	MITBC430DJ.03.00-1	DRIVER SHAFT
38	MITBC431DJ.03.01-2	LIMIT SLEEVE
39	MIC26.0614.0013	BAR COVER
40	MI03.06.1.075	FOAM GRIP

EC Declaration of Conformity

We Mitox (Rochford Garden Machinery Ltd) - BA9 9RS (importer) declare that the product(s):

Designation: Petrol Powered Brushcutter / Hedgetrimmer / Pole Pruner
Model(s): MITOX 28MT SELECT
Type/Serial No: As per rating label on machine

Complies with the following directive(s):

2006/42/EC Machinery Directive
2004/108/EC EMC Directive
97/68/EC Directive as last amended by 2012/46/EU NRMM
2000/14/EC and 2005/88/EC Noise Directive for outdoor equipment use

The conformity assessment procedure followed was in accordance with:

EN ISO 11806-1:2011 EN ISO 11680-1:2011
EN ISO 10517:2009+A1:2013 EN ISO 14982:2009 ISO 22868:2011

Notified Body:

Intertek Testing Services

Address:

Building No. 86, 1198 Qinzhou Road (North) Shanghai 200233, China

Measured Sound Power Level: 110.6 dB (A)
Guaranteed Sound Power Level: 113 dB (A)

Authorised Signatory and Technical File Holder

Date: 20/11/2015

Signature:



Name: Stewart Anderson
Position: Managing Director
Company: Mitox (Rochford Garden Machinery Ltd)
Address: Wincanton Business Park
 Wincanton
 Somerset
 BA9 9RS







CONDITIONS OF WARRANTY

The manufacturer warrants the product against faulty materials and workmanship for a standard 1 year period and thereafter for the set period specific to each range from the date of purchase. Warranty does not extend to failure due to fair wear and tear.

- SP** - 1 Year
 - SELECT** - 3 Years (Subject to yearly servicing)
 - PREMIUM** - 5 Years (Subject to yearly servicing)
 - PRO** - 5 Years Domestic / 3 Years Commercial (Subject to yearly servicing)
- (Extended warranty is subject to online registration and yearly servicing)*

SP, SELECT and PREMIUM ranges used for commercial purposes have a warranty period of 3 months from the date of purchase.

The manufacturer undertakes to replace any spare parts that are classified as defective by an appointed Mitox service dealer. The manufacturer will not accept liability for the replacement of the machine, either partially or wholly, and /or consequential damages and /or interest charges either directly or indirectly.

Warranty does not cover failure due to:

- Insufficient maintenance.
- Incorrect fuel mixture and stale fuel.
- Abnormal use or accidental damage.
- Incorrect assembly, adjustment or operation of the product.
- Spare parts that are subject to wear e.g. bag, blades, bearings, cables, guards, deflectors, spark plugs, air filters etc.

Neither does warranty extend to:

- Freight and packing costs.
- Use of non-genuine spare parts i.e. those from another manufacturer.
- Use of the machine for any other purpose than that for which it was designed.
- Use and maintenance of the machine in a manner not described in the owner's manual.

As part of our policy of continuous product improvement, we reserve the right to alter or amend this specification without notice. As a result, the product may differ from the information contained herein but any alteration will only be implemented without notice if it is classified as an improvement to the above specification.

READ THE MANUAL CAREFULLY BEFORE OPERATING THE MACHINE

When ordering spare parts, please quote the part number, this can be found in the parts list included in this manual.

Retain your proof of purchase, without which no warranty can be offered.

Mitox Garden Machinery, Wincanton Business Park, Wincanton, Somerset, BA9 9RS